


PIAL 200.2040.1/DALI


Piazza 200 (1xLED 21W 840/4000K 1390lm)

— C0/C180 cd / 1000 lm - - - C90/C270

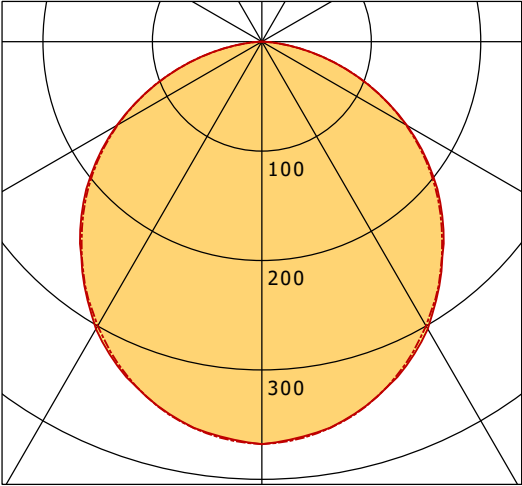

	C0	C90	C180	C270
0°	368	368	368	368
15°	348	349	348	349
30°	303	300	303	300
45°	234	232	234	232
60°	153	152	153	152
75°	63	63	63	63
90°	1	1	1	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

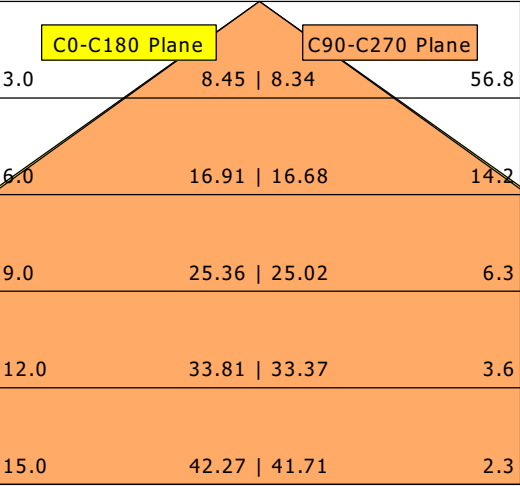

η	LED
Efficiency	66 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	21 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	27.6
UGR C90/C270	27.6
CIE Flux Codes	48 80 96 100 100
Ra/CRI	> 80